



# REQUEST FORM

## Cylindrical bellows


### END FIXING 1

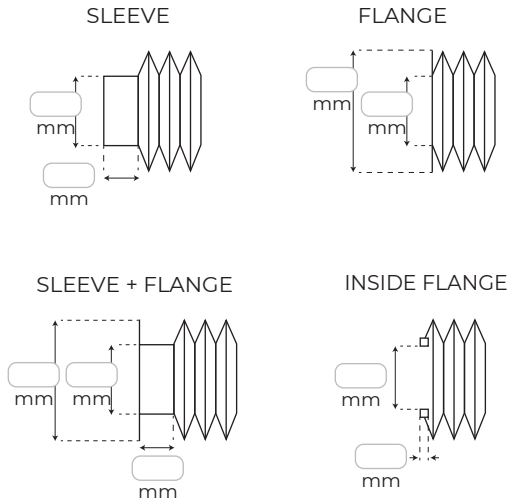

### BELLOWS DIMENSIONS

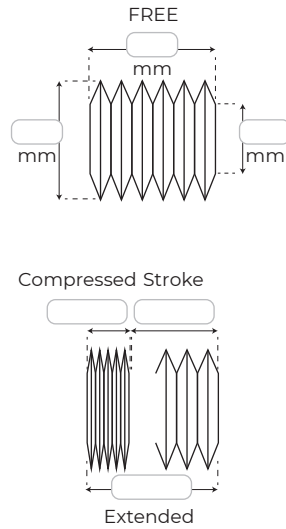

### END FIXING 2

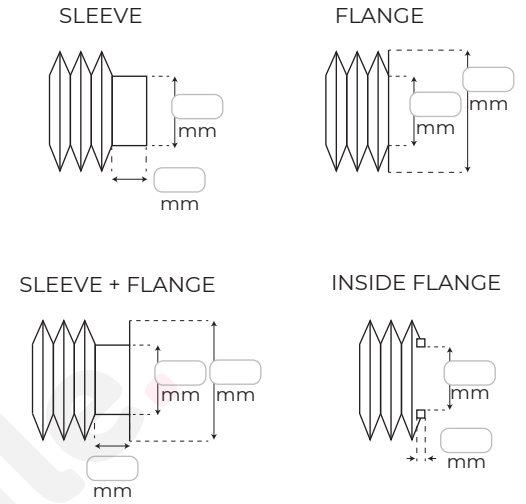

Customer Ref.

Quantity

Colour

### Working position

VERTICAL  HORIZONTAL

### Piece to be protected

STEM, ROD, SHAFT  SCREW  OTHER (SPECIFY):

OUTER DIAMETER OF PIECE TO PROTECT \_\_\_\_\_ mm PITCH: \_\_\_\_\_

### Working environment

DUST  WATER  SHAVINGS  OILS, GREASE, CUTTING FLUIDS

OTHER (SPECIFY): \_\_\_\_\_  INDOORS  OUTDOORS

AMBIENT TEMPERATURE: \_\_\_\_\_ °C CONTACT TEMPERATURE: \_\_\_\_\_ °C

### Options

ZIPPER  VELCRO  AIR OUTLETS  GUIDE RINGS (FOR SCREW)

FLAT PLATES  METALLIC  RIGID PVC THICKNESS: \_\_\_\_\_ mm  HOLES

WIRES:  INSIDE  OUTSIDE

### Comments

\_\_\_\_\_  
\_\_\_\_\_

### Contact details

COMPANY: \_\_\_\_\_ CONTACT NAME: \_\_\_\_\_

E-MAIL: \_\_\_\_\_ PHONE: \_\_\_\_\_

CITY: \_\_\_\_\_ COUNTRY: \_\_\_\_\_